

Calibration Module  
 Slot 1-4 - Pulser Module (GA0)  
 Slot 5 - QIE Readout (GA1)

Slots 1	2	3
Core 1	GA1	GA2
GA0		

Slots 4	5	6
Core 2	GA1	GA2
GA0		


Slots 7	8	9
Core 3	GA1	GA2
GA0		

CCM Module  
 Slot 10 - Serial Communication  
 Slot 11 - Temperature  
 Slot 12 - Timing A  
 Slot 13 - Timing B

Slots 14	15
Core 4	GA1
GA0	

Slots 16	17	18
Core 5	GA1	GA2
GA0		

Slots 19	20	21
Core 6	GA1	GA2
GA0		

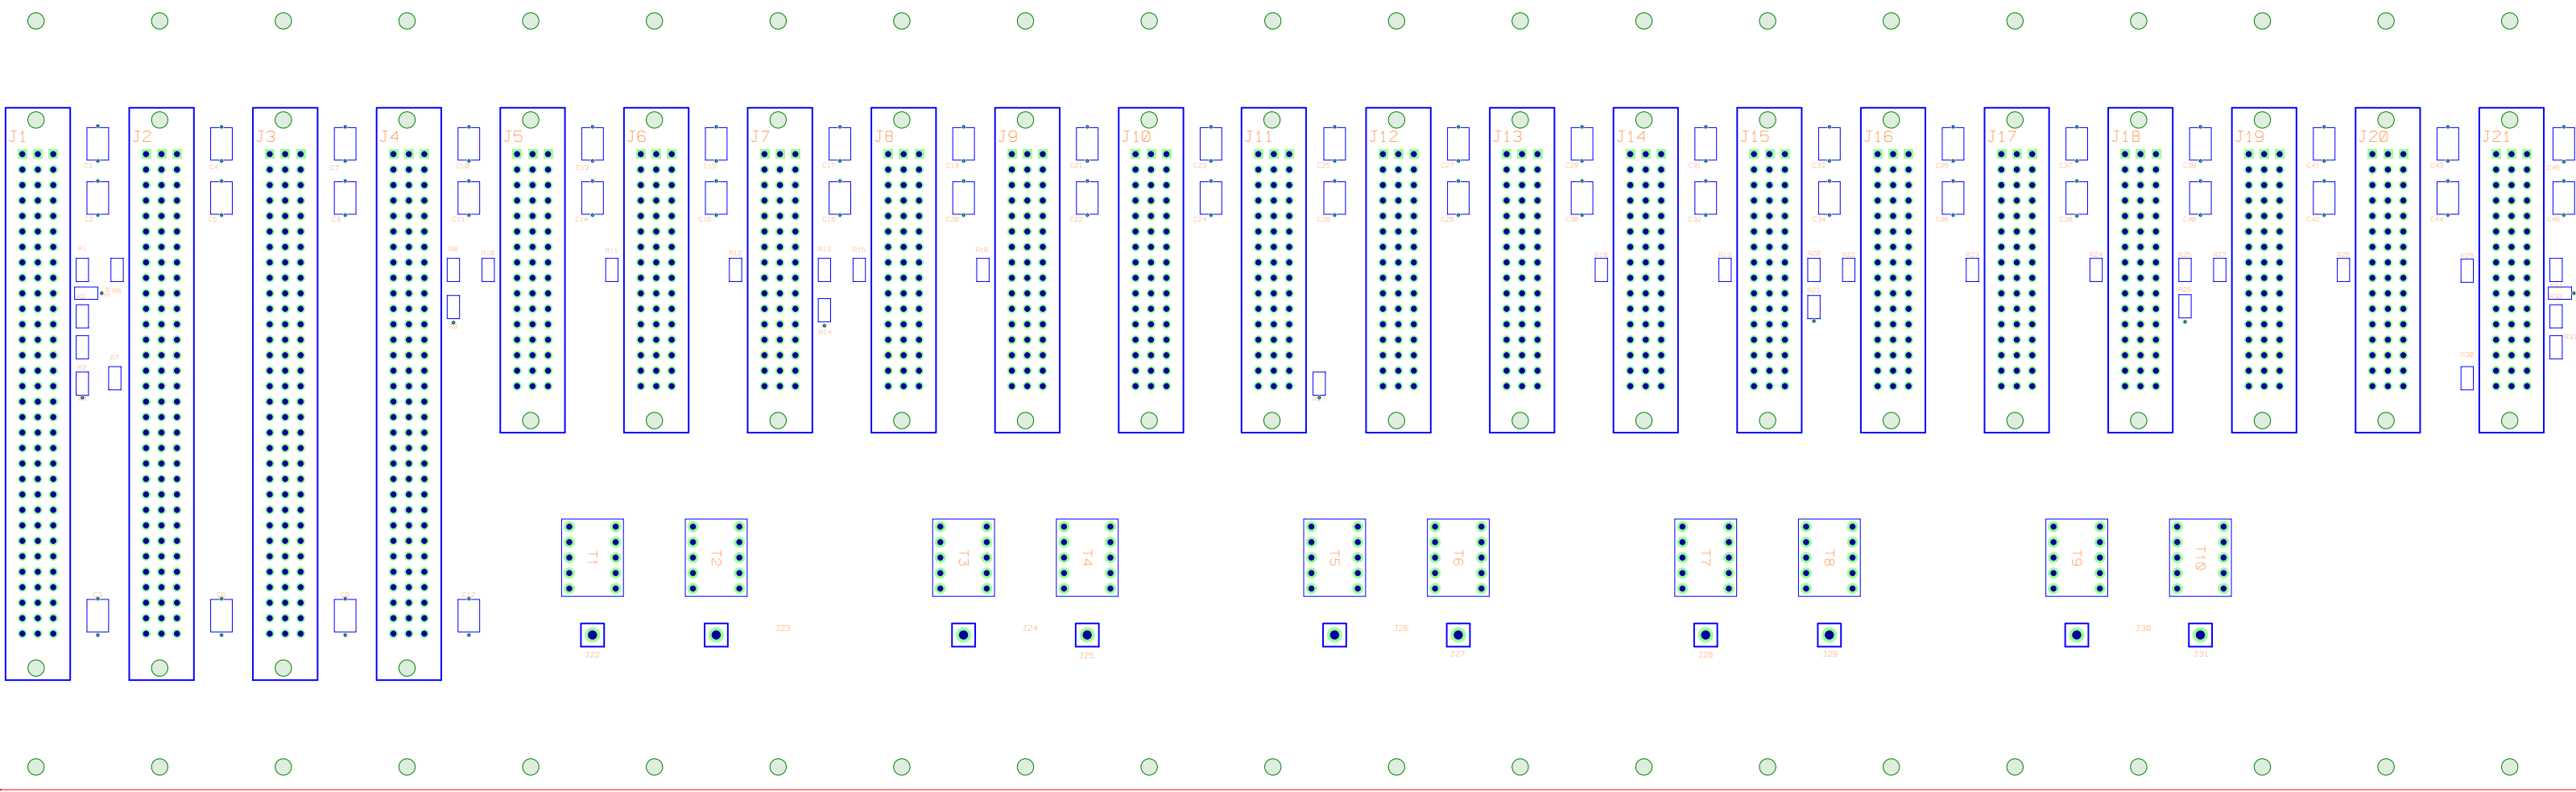

CCM Module  
 has the ability to address up to 6 groups of backplane cards.  
 These groups are referred to as cores.

GA0, GA1 and GA2 represent the Geographical Address within a CCM core group. These provide bits 4 and 5 of the serial communication address: GA0 = 0x00, GA1 = 0x10, GA2 = 0x20.